



Объединение юридических лиц в форме ассоциации «Общенациональное движение «Бобек» Конгресс ученых Казахстана

ISSN 2664-2271





«ГЛОБАЛЬНАЯ НАУКА И ИННОВАЦИЯ 2020: ЦЕНТРАЛЬНАЯ АЗИЯ»

№ 6(11). Декабрь 2020 СЕРИЯ «ТЕХНИЧЕСКИЕ НАУКИ» Журнал основан в 2018 г.

III TOM

ГЛАВНЫЙ РЕДАКТОР:

Ж.Малибек, профессор;

Ж.Н.Калиевк.п.н.;

ЛюДэмин (Китай),

Е.Л. Стычева, Т.Г. Борисов (Россия)

Заместители главного редактора: Е. Ешім, Е. Абиев (Казахстан)



Consolidation of legal entities in the form of anassociation «National Movement «Bobek» Congress of scientists of Kazakhstan

ISSN 2664-2271





«GLOBAL SCIENCE AND INNOVATIONS 2020: CENTRAL ASIA»

No. 6(11). December 2020 SERIES "TECHNICAL SCIENCES" The journal was founded in 2018.

III VOLUME

CHIEF EDITOR:

J. Malibek, professor;
Zh.N. Kaliev, candidate of pedagogical sciences;
Liu Deming (China),
E.L. Stycheva, T.G. Borisov (Russia)
Deputy chiefeditors: E. Yeshim, E. Abiev (Kazakhstan)



UDC 697.92; 533.6; 636.5.033.

USING CFD SIMULATION IN POULTRY HOUSE WITH SIDE VENTILATION SYSTEM

Trokhaniak Viktor Ivanovych

Associate professor of department of Heat and Power Engineering of National University of Life and Environmental Sciences of Ukraine.

Kyiv, Ukraine.

Abstract. Exposure and the outbreak of diseases result in significant losses in large scale poultry operation. New ventilation systems are necessary to provide safe and homogenous internal environment at large enterprises, especially under the changeable climatic conditions of global warming. Within the framework of this investigation, computational fluid dynamics (CFD) simulation of a side ventilation system in a poultry house during winter seasons has been conducted. As a results, 3D temperature fields, current lines and pressures in a poultry house have been found. It has been determined that fresh air valves arranged at a height of 200 mm from flooring work better than those traditionally arranged at a height of 400 mm. The erection of walls on the inside of a poultry house framework as well as the decrease in the height of flooring improve poultry house aerodynamics.

Key words: CFD, aerodynamics, poultry house, side ventilation system, fresh air valves

The authours of the paper [1] suggested a new cooling system to be applied in a poultry house with the use of heat-exchangers of a special design [2, 3] CFD simulation of air flows and heat-and-mass exchange in a poultry building is presented. Here, water from subterranean wells is used as a cooler. There are recommendations provided for choosing the design of ventilation systems in poultry houses. In their follow-up studies [4] the authours optimize the height of extractor-type fan arrangement. It is shown that it is to the point to arrange ventilation equipment at a height of 1.5 m. Here, the area of dead-air zones and the inequality of air velocity distribution close to poultry decreases.

Aimed at the decrease of energy cost and the increase of quality indices of air environment when providing the necessary conditions for poultry management [5], the authors conducted experimental research and numerical simulation. In the process of investigation, the decrease of energy expenditures for establishing microclimate during broiler management has been obtained. The quality of air environment in poultry houses has been increased. It makes it possible to decrease the disposal of feeding stuffs and the loss of poultry stock and, as a results, increase the economic efficiency of production and product quality.

The ventilation scheme was constructed in such a way that air flow reached the center of the building in winter season in order to normalize the aerodynamic parameters of a poultry house. Such a method made it possible to reduce the loss of fresh air pressure in the poultry building. Thus, the following structural alterations were made: the width of the building was increased from 21 m, which was typical in a traditional design, to 22.36 m in a new design (see fig. 1).




Fig. 1. Suggested cross sectional diagram of poultry house structural dimensions



Numerical simulation was conducted at valve opening being 0.1 m, 0.066 m and 0.049 m, respectively. Ventilation valves Wlotpowietrza 857x337 mm 3000-VFG Przepustowocs 2900 v^3 /h were applied. They were arranged on the side walls being 79 pcs in total.

The results of CFD 3D simulation of a poultry house has made it possible to compare three modifications of valve opening in case of side poultry house ventilation system. Prior to conducting numerical simulation, 3D mesh has been generated applying the finite-element method in ANSYS Meshing.

Fig. 2 present air flow hydrodynamics in a poultry house. As it has been already mentioned, air flow is directed upwards by fresh air valves. However, due to low entry pressures and velocities, after passing the third of the building the air falls down. The valves are arranged at a height of 200 mm from the flooring (Fig, 2a). The air smoothly moves close to the flooring area and is directed to the center of the building. The valves, that are arranged at a height of 400 mm from flooring cannot provide the same impact. This can be caused by perturbation due to large building airspace. The average entry velocity at various air expenditures ranges from 6.39 m/s to 9.62 m/s.

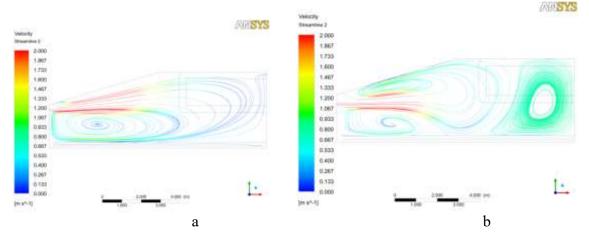


Fig. 2. Stream lines (m/s) in a poultry house at valve opening being 0.049 m at a distance from the front end wall of: a - 10.3 m; b - 52.3 m

Fig. 3 present pressure loss values in fresh air valves. The least pressure loss is shown to be 24.3 Pa at valve opening being 0.1 m and the greatest one -55.68 Pa at 0.049 m, respectively.

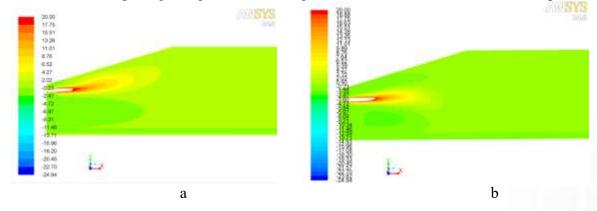


Fig. 3. Pressure loss (Pa) in a fresh air valve of a poultry building at valve opening being 0.049 m at a distance from the front end wall of: a - 10.3 m; b - 52.3 m

Conclusions. The design of a poultry house has been improved. It has been suggested arranging spoilers above fresh air valves at an angle of 750 from a vertical line; mounting



outside walls on the inside of a concrete framework; increasing the width of a poultry house up to 22.36 m; decreasing the height of flooring up to 3.9 m above the floor level.

Effective arrangement of fresh air valves and the improvement of aerodynamic characteristics in a poultry house building have been investigated applying CFD. It has been determined that the least pressure loss is 24.3 Pa at valve opening being 0.1 m and the greatest loss is 55.68 Pa at 0.049 m, respectively.

The conducted research shows that the valves, which are arranged at a height of 200 mm from flooring are much more effective. The valves, which are arranged at a height of 400 mm from flooring cannot provide the same impact.

REFERENCES

- 1. Gorobets V.G., Trokhaniak V.I., Antypov I.O., Bohdan Yu.O., (2018), The numerical simulation of heat and mass transfer processes in tunneling air ventilation system in poultry houses, *INMATEH: Agricultural Engineering*, vol.55, no.2, pp.87-96.
- 2. Gorobets V., Bohdan Y., Trokhaniak V., Antypov I., Masiuk M., (2019), Summarizing of Nusselt numbers and Euler numbers in depending of Reynolds number for the compact tube bundle of small diameter tubes by experimental and numerical methods of researches. *E3S Web of Conferences*, vol. 128, p. 04003. https://doi.org/10.1051/e3sconf/201912804002.
- 3. Gorobets V.G., Bohdan Yu.O., Trokhaniak V.I., Antypov I.O., (2018), Experimental studies and numerical modelling of heat and mass transfer process in shell-and-tube heat exchangers with compact arrangements of tube bundles, *MATEC Web of Conferences*, vol. 240, p. 02006. https://doi.org/10.1051/matecconf/201824002006.
- 4. Gorobets V.G., Trokhaniak V.I., Rogovskii I.L., Titova L.L., Lendiel T.I., Dudnyk A.O., Masiuk M.Y., (2018), The numerical simulation of hydrodynamics and mass transfer processes for ventilating system effective location. *INMATEH: Agricultural Engineering*, vol. 56, no 3, pp. 185-192.
- 5. Trokhaniak V.I., Rutylo M.I., Rogovskii I.L., Titova L.L., Luzan O.R., Bannyi O.O., (2019), Experimental studies and numerical simulation of speed modes of air environment in a poultry house. *INMATEH Agricultural Engineering*, vol. 59, no 3, pp. 9-18. https://doi.org/10.35633/INMATEH-59-01.

UDC 631.331.85

INVESTIGATION OF THE INFLUENCE OF THE NOZZLE FORM of a screw feeder ON THE PROCESS OF TRANSPORTATION OF BULK MATERIALS

Hevko Roman Bohdanovych

Prof. DSc. Eng., Ternopil Ivan Puluj National Technical University, Ternopil, Ukraine

Trokhaniak Oleksandra Mykolaivna

Assoc. Prof. Ph.D. Eng., National University of Life and Environmental Sciences of Ukraine, Kyiv, Ukraine

Abstract: The paper presents the developed design of a research prototype of a pneumatic screw conveyer at determining power characteristics for moving various types of loose materials depending on the influence of pressure and air volume. The influence of the form and the



СОДЕРЖАНИЕ CONTENT

Аинақұл Аитолқын берікқызы	
Исабек Балжан	
Тоқмаханбет Жансерік Досмаханбетұлы	
Кальбекова Гульфира Койлановна	13
Махамбетова У.К., Абдуллаев Х.Т., Конысбаева Ж.О	17
Mussane IvanGuilherme, Ақберді Әдемі Егембердіқызы	20
Умбетов Абилхан Умбетович	
Фозилов Фирдавс Дилшод угли, Исмоилов Абдурахим Ибрахимугли	26
Ирматова Дилёра Бахтиёровна	
Талипова Озода Хабировна, Фозилов Фирдавс Дилшод угли	30
Рузибаев Ортик Бахтиёрович, Фозилов Фирдавс Дилшод угли	31
Жўраев Ғуломжон Примович	33
Жетенбаев Н.Т., Балбаев Ғ.Қ., Шингисов Б.Т.	38
Nazarov Erkin Sadikovich, Sobirov Shohjahon Ochil o'g'li	43
Оспан Азамат Жұлдызбекұлы	46
Исабеков Даурен Джамбулович.	49
Ашуров Азамат Абдикулович, Кинтонова Алия Жексембаевна	53
Yusupov Sarvarbek Sodiqovich, Bakirov Lutfillo Yuldoshalievich	55
Маратұлы Бауыржан	61
Химматов Ибодилла Кудратович	64
Худайкулова Сарвиноз Уктамовна	
Курмангазы Акниет	71
Абдуллаев Жамолиддин Солижонович, Мирзажанов Махмуджон А	хмадовичу
Миржалилов Одилжон Исломжон ўғли	
Содиков Исмоилжон Каххоржон угли	
Садиков Равшонбек Мухаммад угли	
Комилов Самандар Искандарович, Худайкулов Рашидбек Мансуржанович	
Kakabaýew Sapargeldi Gurbanowiç, Nurberdiýew Rejepnur	
Сарыев Сердар Сапаргелдиевич, Бабаев Байрам Мухамметсахыдович,	
Аташ Мамметгылыджович	
Trokhaniak Viktor Ivanovych	95
Hevko Roman Bohdanovych, Trokhaniak Oleksandra Mykolaivna	
Zhussipkali Faizolla Assylbekuly	
Шахатова Алия Талгатовна, Мирғалиқызы Толқын, Хуанган Нурбол	
Дәнебай Ақерке Әсілханқызы	
Толекова Шырын Нурахметовна	
Ирматова Жылдыз Камиловна, Абдыкаарова Айгерим Талантовна,	
Рысгул Жунусалиевна	
Жамек Нуркен Асанулы	
Земзюлин Дмитрий Сергеевич	
Колпакова Екатерина Александровна	